

# iNFINITY

## N-type

Bifacial Module with Double Glass

# DMxxxM10T-B54HBB

## 425~445W

**22.8%**  
Max. Efficiency

- **Leading manufacturing**  
40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**  
100% green production, transparent supply chain and excellent ESG rating in the solar industry.

**25**  
25 years  
product warranty

**30**  
30 years linear  
power warranty



### Outstanding Aesthetics

Designed with aesthetics in mind and manufactured using DMEGC Advanced Black Technology.



### Extended Stress Tests

Protection against harsh environmental conditions  
Certified by TÜV Rheinland.



### Green Product

Focus on circular economy - low carbon footprint, PFAS-free and recyclable components.

## COMPANY MANAGEMENT SYSTEM

SA 8000: ILO Standards. Social responsibility standards  
ISO 9001: Quality management system  
ISO 14001: Environmental management system  
ISO 45001: Occupational health and safety management system  
ISO 50001: Energy management system  
ISO 27001: Information security management system

## PRODUCT CERTIFICATION


IEC 61215, IEC 61730  
Extended-Stress (IEC TS 63209)  
Ammonia Corrosion (IEC 62716)  
Salt Mist Corrosion (IEC 61701)  
LeTID (IEC TS 63342)  
Dust & Sand (IEC 60068)  
UL61730 certified products



Warranty partner

Munich RE

## POWER WARRANTY

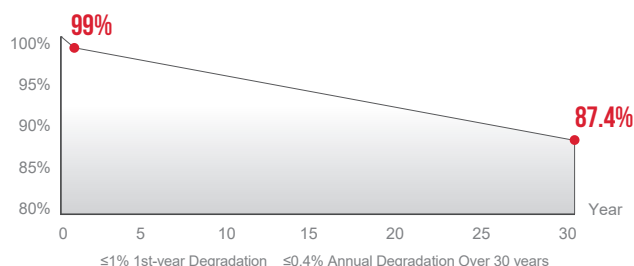


# DMxxxM10T-B54HBB



## Module Specification

|                                        |                                                                                                              |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Cell Type                              | N type Mono-crystalline, 108(6×18)                                                                           |
| Dimensions (mm)                        | 1722×1134×30                                                                                                 |
| Weight (kg)                            | 23.6                                                                                                         |
| Front Cover                            | 2mm heat strengthened glass, Anti-reflective coating                                                         |
| Rear Cover                             | 2mm heat strengthened glass                                                                                  |
| Junction Box                           | 3 Diodes, IP68 according to IEC 62790                                                                        |
| Output Cables<br>(Including Connector) | 4mm <sup>2</sup> /Portrait: 300mm (+)/200mm(-)<br>Landscape: 1100mm(+)/1100mm(-)<br>Length can be customized |
| Connector Type                         | PV-ZH202B or MC4(1500V)                                                                                      |

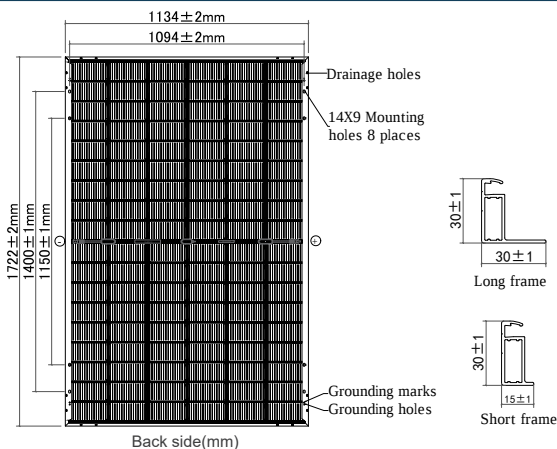

## Electrical Specifications<sup>1</sup>

| Module Type                                | DM425M10T-B54HBB |                   | DM430M10T-B54HBB |       | DM435M10T-B54HBB |       | DM440M10T-B54HBB |       | DM445M10T-B54HBB |       |
|--------------------------------------------|------------------|-------------------|------------------|-------|------------------|-------|------------------|-------|------------------|-------|
| Testing Condition                          | STC <sup>2</sup> | NMOT <sup>3</sup> | STC              | NMOT  | STC              | NMOT  | STC              | NMOT  | STC              | NMOT  |
| Maximum Power (P <sub>max</sub> /W)        | 425              | 320               | 430              | 324   | 435              | 327   | 440              | 331   | 445              | 335   |
| Maximum Power Current (I <sub>mp</sub> /A) | 13.03            | 10.47             | 13.10            | 10.53 | 13.17            | 10.59 | 13.24            | 10.64 | 13.31            | 10.70 |
| Maximum Power Voltage (V <sub>mp</sub> /V) | 32.63            | 30.51             | 32.83            | 30.70 | 33.03            | 30.89 | 33.24            | 31.08 | 33.45            | 31.28 |
| Short-circuit Current (I <sub>sc</sub> /A) | 13.81            | 11.19             | 13.88            | 11.24 | 13.95            | 11.30 | 14.02            | 11.36 | 14.09            | 11.41 |
| Open-circuit Voltage (V <sub>oc</sub> /V)  | 39.24            | 36.95             | 39.44            | 37.14 | 39.64            | 37.32 | 39.84            | 37.51 | 40.04            | 37.70 |
| Module Efficiency STC (%)                  | 21.8             |                   | 22.0             |       | 22.3             |       | 22.5             |       | 22.8             |       |

<sup>1</sup> Measurements according to IEC 60904-3, Measurement tolerance: I<sub>sc</sub>: ±4%, V<sub>oc</sub>: ±3%, Test uncertainty for P<sub>max</sub>: ±3%, Bifaciality: 80%±5%

<sup>2</sup> STC (Standard Test Condition): Radiation 1000W/m<sup>2</sup>, Module temperature 25°C, AM=1.5

<sup>3</sup> NMOT: Radiation 800W/m<sup>2</sup>, Ambient temperature 20°C, AM=1.5, Wind Speed 1m/s



## Electrical Specifications<sup>1</sup>(BNPI<sup>2</sup>)

|                                            |       |       |       |       |       |
|--------------------------------------------|-------|-------|-------|-------|-------|
| Nameplate Power (W)                        | 425   | 430   | 435   | 440   | 445   |
| Maximum Power (P <sub>max</sub> /W)        | 470   | 475   | 481   | 486   | 492   |
| Maximum Power Current (I <sub>mp</sub> /A) | 14.38 | 14.46 | 14.53 | 14.61 | 14.69 |
| Maximum Power Voltage (V <sub>mp</sub> /V) | 32.67 | 32.87 | 33.07 | 33.28 | 33.49 |
| Short-circuit Current (I <sub>sc</sub> /A) | 15.19 | 15.27 | 15.35 | 15.42 | 15.50 |
| Open-circuit Voltage (V <sub>oc</sub> /V)  | 39.24 | 39.44 | 39.64 | 39.84 | 40.04 |

<sup>1</sup> Measurements according to IEC 60904-3, Measurement tolerance: I<sub>sc</sub>: ±4%, V<sub>oc</sub>: ±3%, Test uncertainty for P<sub>max</sub>: ±3%

<sup>2</sup> BNPI: Front radiation 1000W/m<sup>2</sup>, Rear radiation 135W/m<sup>2</sup>, Module temperature 25°C, AM=1.5



## Temperature Characteristics

|                                                    |        |
|----------------------------------------------------|--------|
| Nominal Module Operating Temperature (NMOT)        | 42±2°C |
| Temperature Coefficient of P <sub>max</sub> (%/°C) | -0.29  |
| Temperature Coefficient of V <sub>oc</sub> (%/°C)  | -0.25  |
| Temperature Coefficient of I <sub>sc</sub> (%/°C)  | +0.048 |



## Packaging


|                        |                |
|------------------------|----------------|
| Container              | 40HQ           |
| Pallet Dimensions (mm) | 1770×1140×1250 |
| Pieces per Pallet      | 36             |
| Pieces per Container   | 792            |



## Operating Conditions

|                                   |                        |
|-----------------------------------|------------------------|
| Operating Temperature (°C)        | -40 to +85             |
| Maximum System Voltage (V)        | 1500 DC(IEC)           |
| Overcurrent Protection Rating (A) | 30                     |
| Power Output Tolerance (%)        | 0~3                    |
| Protection Class                  | Class II               |
| Max. Test Load, Push/Pull (Pa)    | Front 5400 / Back 2400 |
| Max. Design Load, Push/Pull (Pa)  | Front 3600 / Back 1600 |
| Hail Class                        | HW3*                   |

\* Reference diameter of ice balls-VKF 30mm, Ice ball storage temp -20°C.

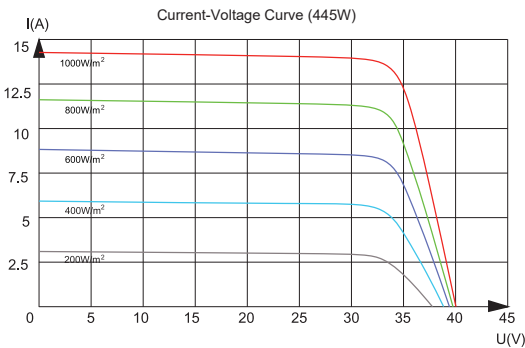

Hengdian Group DMEGC Magnetics Co.,Ltd.  
Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 322118  
Tel: 0086-579-8658-8826 E-mail: solar@dmegc.com.cn  
Website: www.dmegcsolar.com

DMEGC Solar US Inc  
Add: 17800 Castleton St., Ste. 389, City of Industry, Ca 91748  
E-mail: solar@dmegc.com.cn Website: https://us.dmegcsolar.com/

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail. All information in this data sheet corresponds to EN 50380. Changes and errors excepted. Document: EN DS-M10T-B54HBB-20250715.

©DMEGC 2025 – All Rights Reserved